



Rear Case Replacement

Instructions for accessing the internal components of the Alpha A3000.

Written By: Leonard Holloman



INTRODUCTION

This is a guide for accessing the internal workings of the camera. Before following these instructions make sure the proper replacement parts are available.



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-


Step 1 — Rear Case



- Remove the seven highlighted screws shown here.



⚠ Screws are teeny tiny, don't lose them!

Step 2

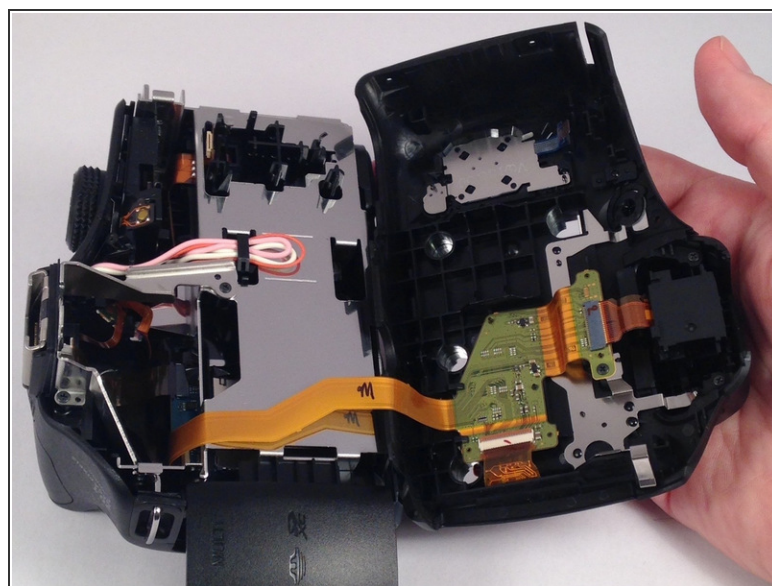

- Remove this final screw from the memory card compartment.
- Remove the chassis by pulling the back cover away from the camera.

Step 3

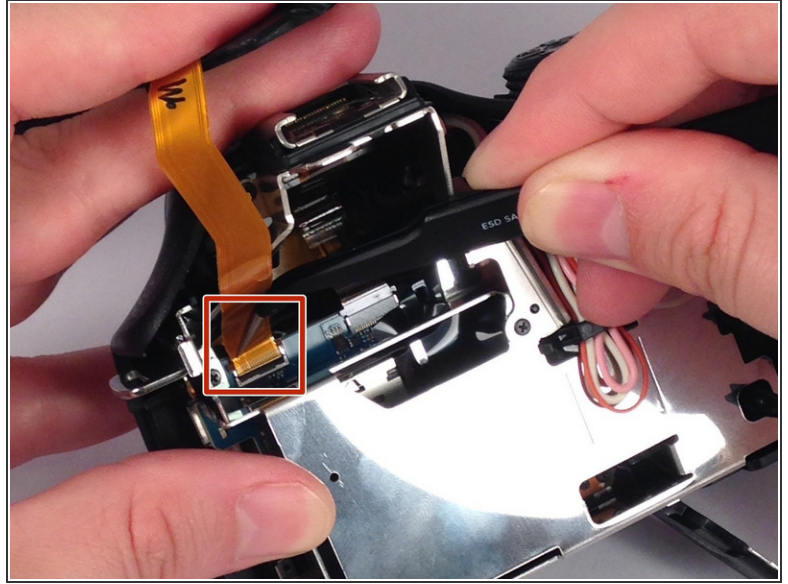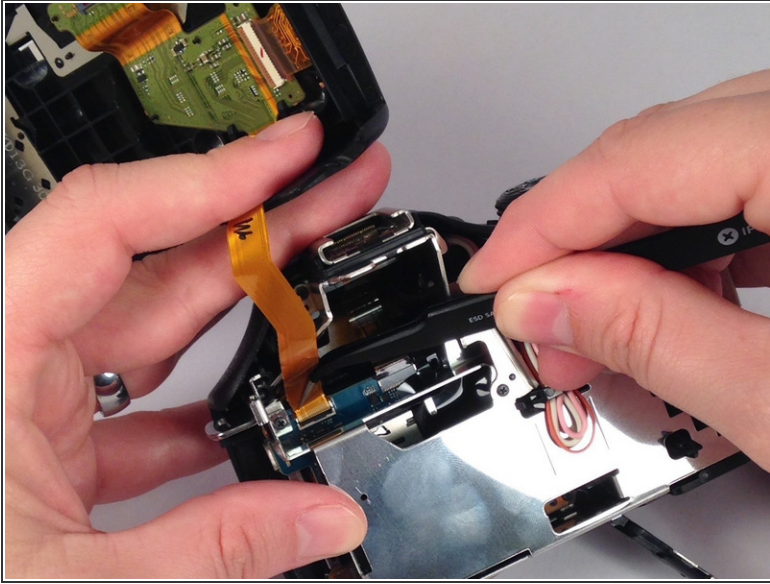

- Gently but forcefully lift up on the parallel cable connecting the two halves of the camera.

This document was last generated on 2017-07-17 03:49:17 PM.